
Anaerobic Membrane Bioreactors for Treatment of Wastewater at Contingency Locations



Capt Andrew Hoisington
andrew.hoisington@usafa.edu

The views expressed in this presentation are those of the presenter and do not reflect the official policy or position of the United States Air Force, Department of Defense, or the U.S. Government

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE MAY 2009		2. REPORT TYPE		3. DATES COVERED 00-00-2009 to 00-00-2009	
4. TITLE AND SUBTITLE Anaerobic Membrane Bioreactors for Treatment of Wastewater at Contingency Locations				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) United States Air Force Academy, Department of Civil and Environmental Engineering, USAF Academy, CO, 80840				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES Presented at the NDIA Environment, Energy Security & Sustainability (E2S2) Symposium & Exhibition held 4-7 May 2009 in Denver, CO.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 17	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

Outline

- Need for wastewater treatment
- What is an MBR
- Anaerobic Process
- Characteristics of AnMBR
- Membrane Fouling
- Performance
- Energy Balance

Military Operations in the last 20 years

(deploymentlink.osd.mil, 2009)

Fort Benning Mobilization Station
US Navy 6th Fleet
US Army Southern Europe Task Force
US Marine Corps Forces Europe
US Army Europe

JTF Bravo
New Horizon

Combating Terror
In the Philippines

Operation Bright Star
Operation Atlas Response
Operation Focus Relief
Operation Restore Hope
Operation United Shield
Operation Shepherd Venue

Operation Anaconda
Operation Enduring Freedom
Operation Iraqi Freedom
Operation Desert Shield
Operation Desert Storm

US Navy 7th Fleet
US Army Pacific Deployment/Exercises



Existing Conditions, Nasiriyah Iraq




All pictures (USAID, 2009)




Defenselink.mil (2009)




What is an MBR

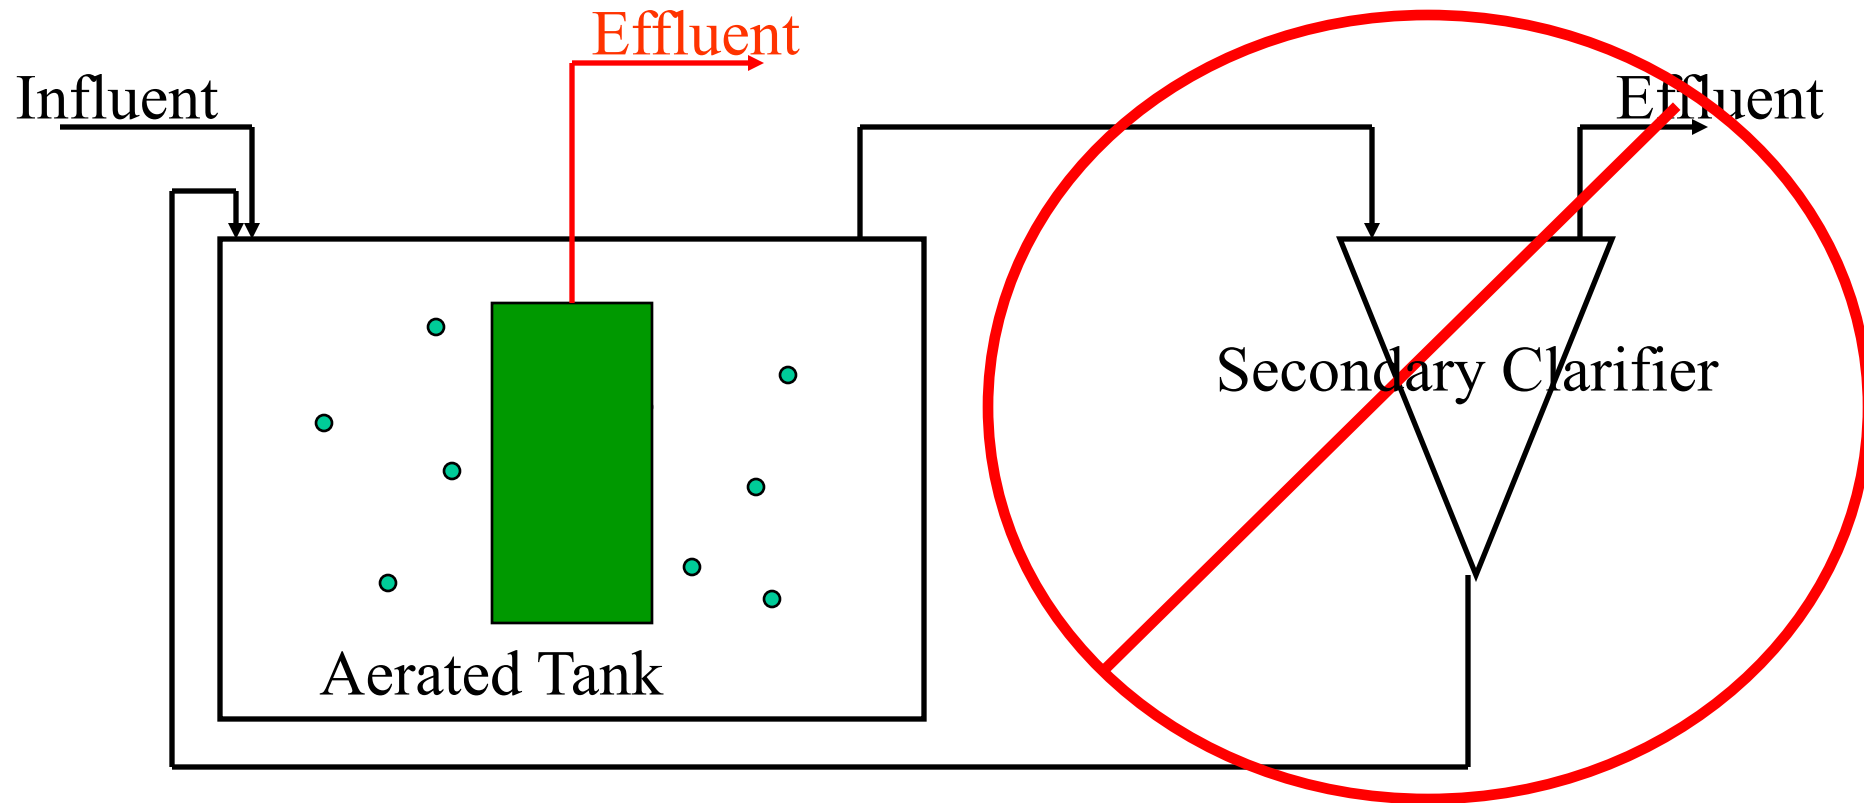

Membranes

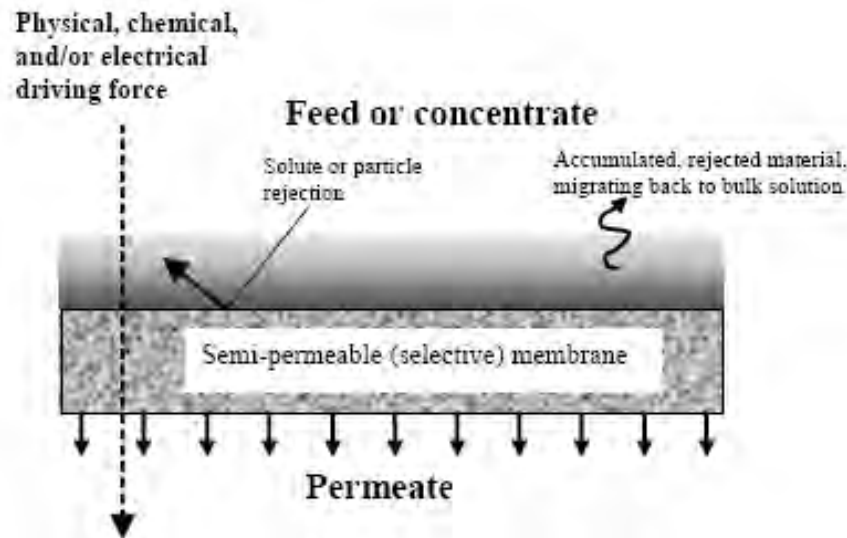

(Lawler, 2006)

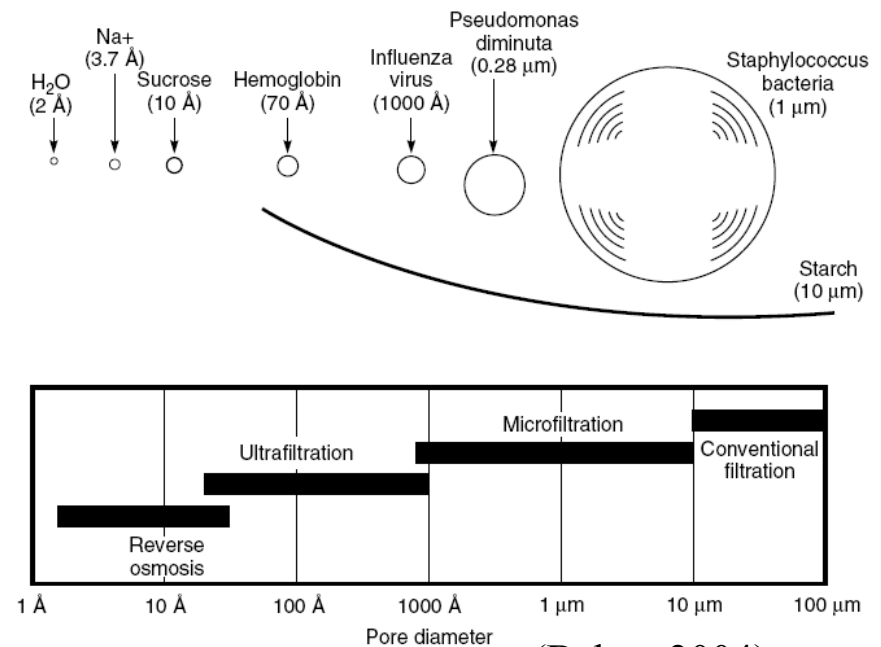


(Baker, 2004)

Anaerobic Process


- The Good
 - lower sludge production
 - lower nutrient requirements
 - methane production
 - treats high organic concentrations
- The Bad
 - Slow growth rate of microorganisms
 - Delicate System

AnMBR Configurations – Cross Flow

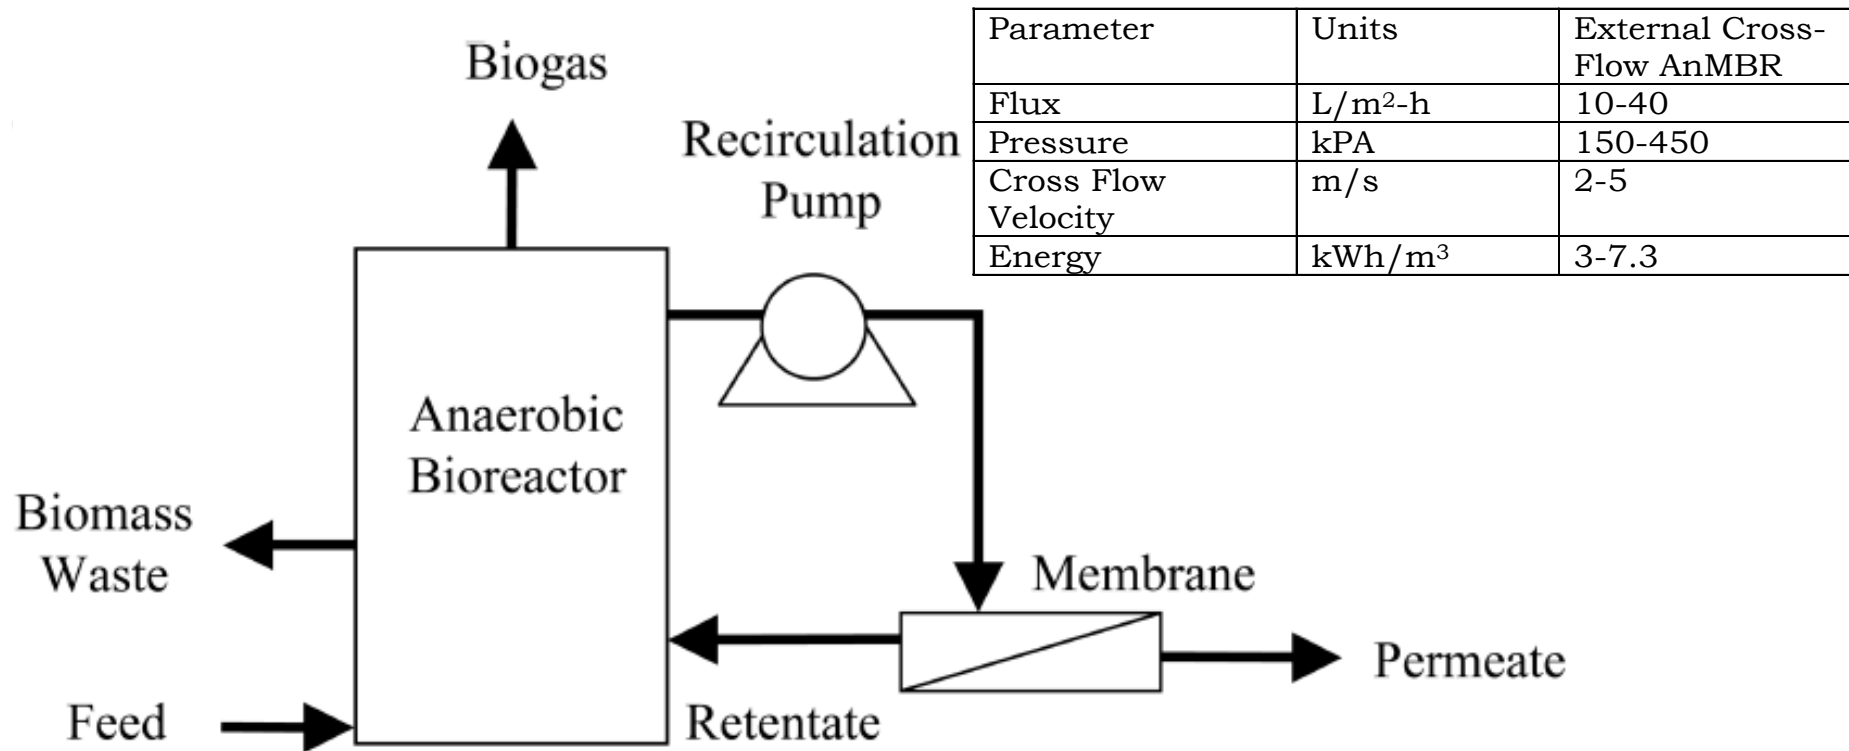


(Liao, 2006)

AnMBR Configurations - Submerged

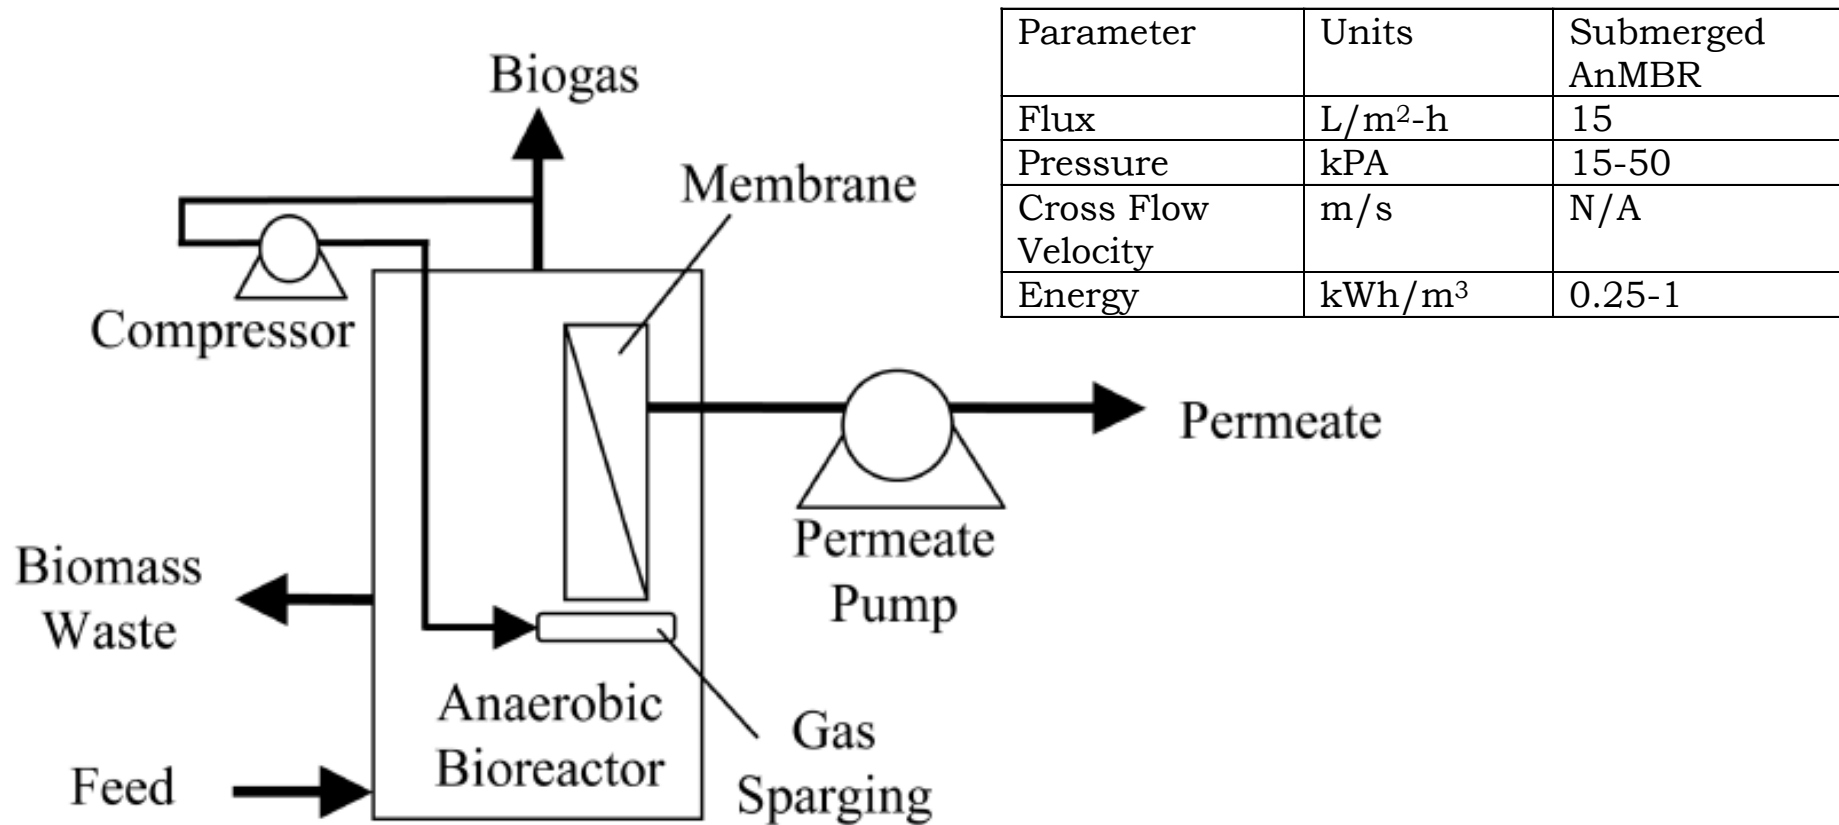


(Liao, 2006)

AnMBR Configurations – Combinations

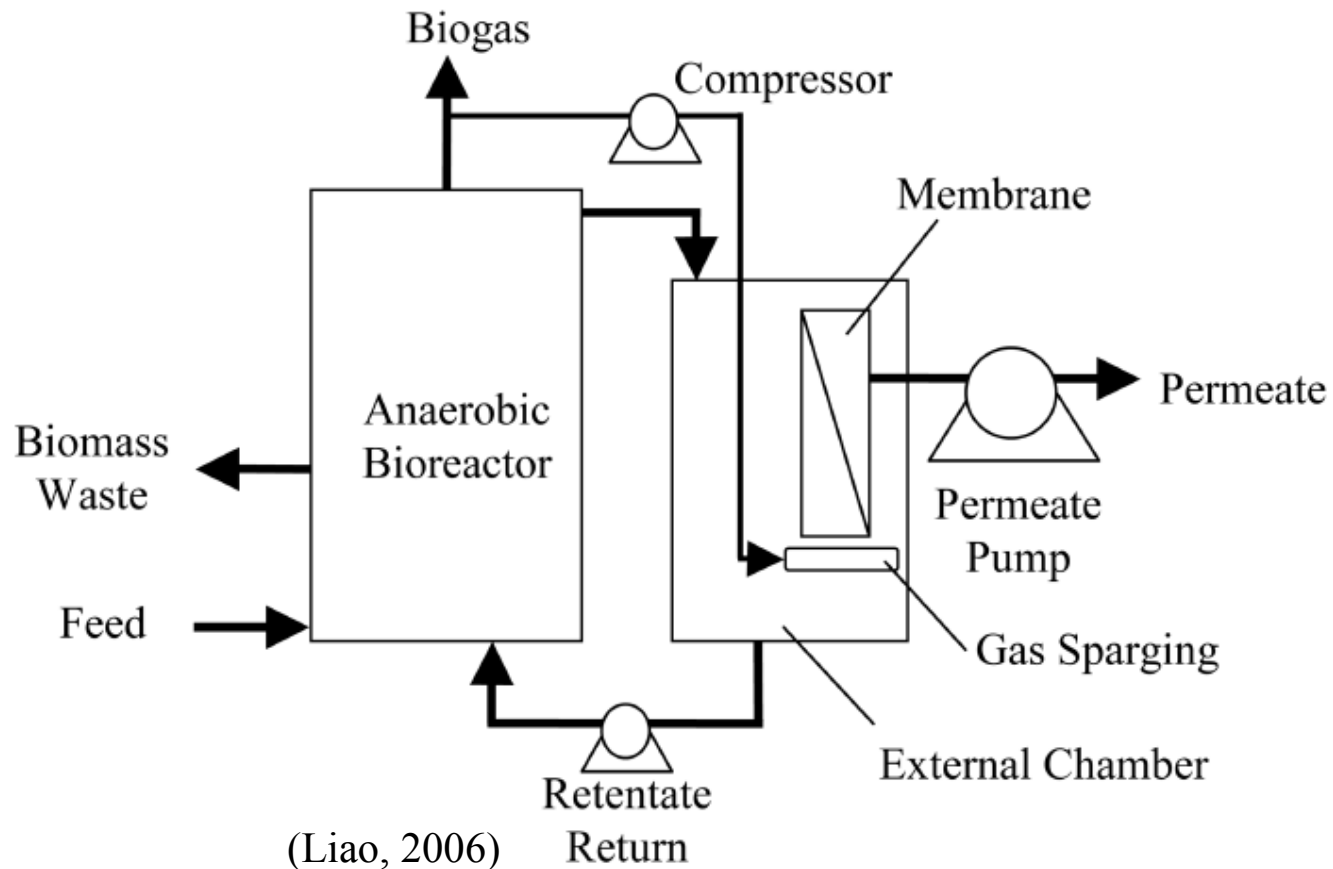


Characteristics of AnMBR

- Decoupled HRT and SRT
- Methane Production
- Capital and Maintenance Costs
- Maintenance Requirements

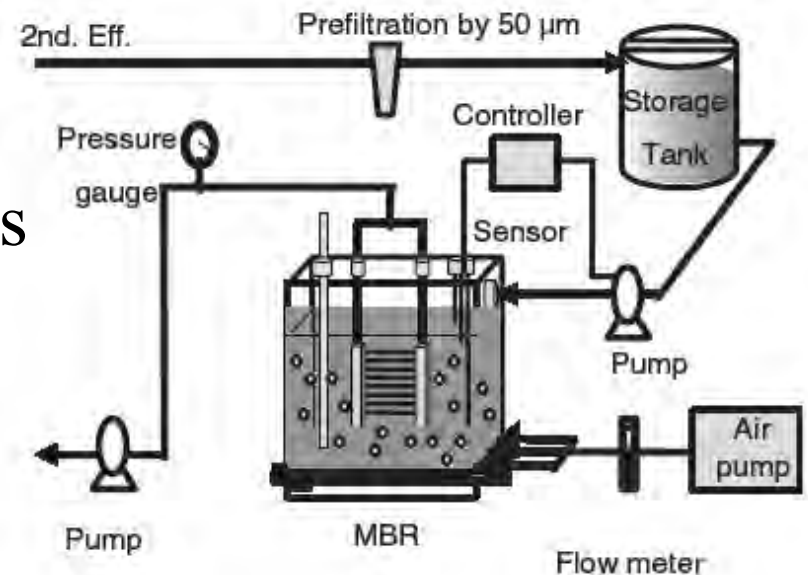

Membrane Fouling

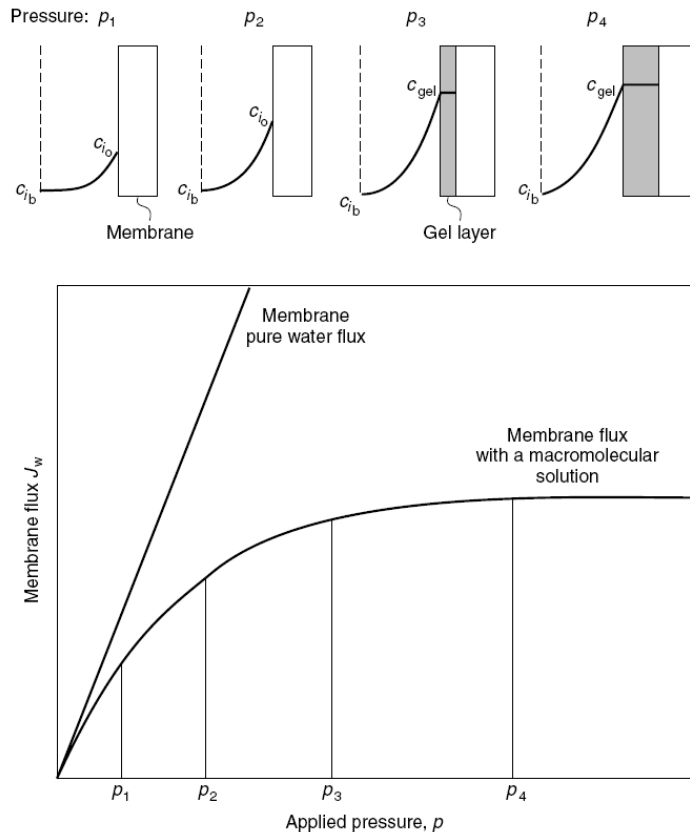

(Cheryan, 1998)

$$J = \frac{\Delta P}{\mu R} = \frac{\Delta P}{\mu(R_M + R_{ir} + R_r)}$$

Membrane

Internal Clogging

External Clogging

Membrane Fouling

- Biogas sparging (submerged)
- Increase cross-flow velocity (external cross-flow)
- Backflushing
- PAC Addition
- Physical and chemical cleaning

Performance

	COD Removal Efficiency (%)	Sludge (kg produced/ kg COD removed)	Biogas (m ³ /kg COD Removed)	Effluent TSS (mg/L)
AnMBR	90+	0.0 – 0.3	0.40	>1
High Rate Anaerobic	80-90	0.1 – 0.5	0.40	30-70

Energy Balance

Assumptions:

2000 people

5% loss of methane in effluent

30-35°C reactor temperature

$$\frac{200 \text{ L}}{\text{Person} - \text{Day}}$$

$$\frac{0.4 \text{ L } CH_4}{g \text{ COD}}$$

$$\frac{8.28 \text{ kw} - h}{m^3 \text{ } CH_4}$$

(Metcalf and Eddy, 2003)

Energy Production/Losses

CH ₄ Production	517 kw-h
Operational Energy (Submerged)	100 - 400 kw-h
Operational Energy (Cross Flow)	1200 – 2920 kw-h

If water needs to be heated:

5°C Change	2322 kw-h
10°C Change	4645 kw-h

Questions??

